

# ↑ RINGO

Detachable ring for arborists and workers at height. Intended for semi-permanent connection. Can be loaded in any direction.

## DESCRIPTION



### KEY FEATURES

- inner diameter: 46 mm
- clipping gap: 10 mm
- minimum strength in any possible axis: 20 kN

## STANDARDS

CE 1015  
EN 362:2004/M

## FEATURES


75 g / 2.6 oz	unique number	guarantee	revision needed	10 mm	20 kN strength

## MATERIALS



- 91 % aluminium alloy
- 9 % stainless steel

## TECHNICAL DATA

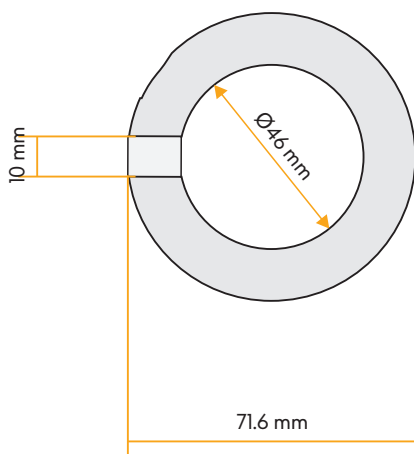

XXXX- unique serial number  
K7002- product code  
MMYY- month and year of production

ATTENTION: For semi-permanent use only. It is not intended for frequent connection/disconnection.

